


All in stock!

Single flute router bits

with optimal chip removal,
generates a superior surface finish
and radically reduces production time!

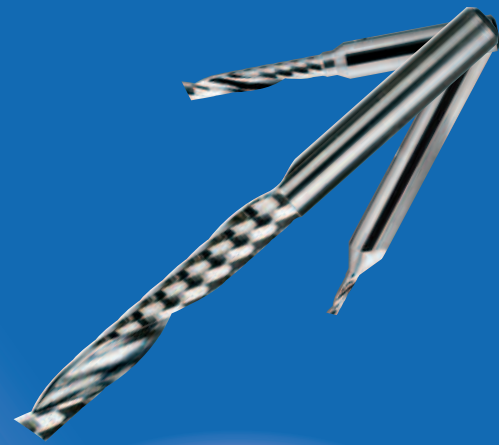


**The superior tool for
acrylic/plastics/wood!**

“ACRYLIC” ROUTER BITS

**Razor sharp, polished
for acrylic, plastics, wood.**


Engraving cutters for acrylic, plastics

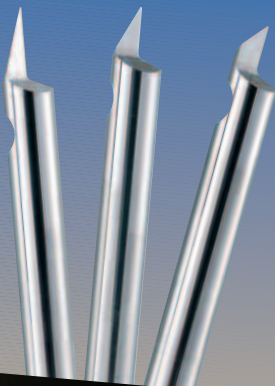

Acrylic

Polished and Balanced
Available in 40°, 60°, 92° incl. angle

Art.no. DOWN-CUT	d	D	ℓ	L
S1-1,0/3-38 A-DC	1,0	3	3	38
S1-1,5/3-4-38 A-DC	1,5	3	4	38
S1-2,0/3-6-38 A-DC	2,0	3	6	38
S1-3,0/3-6-38 A-DC	3,0	3	6	38
S1-3,0/3-11-38 A-DC	3,0	3	11	38
S1-4,0/4-8-50 A-DC	4,0	4	8	50
S1-4,0/4-12-50 A-DC	4,0	4	12	50
S1-4,0/4-14-50 A-DC	4,0	4	14	50
S1-2,0/6-6-50 A-DC	2,0	6	6	50
S1-3,0/6-6-50 A-DC	3,0	6	6	50
S1-3,0/6-11-50 A-DC	3,0	6	11	50
S1-4,0/6-8-50 A-DC	4,0	6	8	50
S1-4,0/6-12-50 A-DC	4,0	6	12	50
S1-4,0/6-14-50 A-DC	4,0	6	14	50
S1-5,0/6-12-50 A-DC	5,0	6	12	50
S1-5,0/6-16-50 A-DC	5,0	6	16	50
S1-5,0/6-22-60 A-DC	5,0	6	22	60
S1-6,0/6-12-50 A-DC	6,0	6	12	50
S1-6,0/6-22-60 A-DC	6,0	6	22	60
S1-8,0/8-12-50 A-DC	8,0	8	12	50
S1-8,0/8-22-64 A-DC	8,0	8	22	64
S1-8,0/8-32-70 A-DC	8,0	8	32	70
S1-10,0/10-22-64 A-DC	10,0	10	22	64



**Balanced for
high frequency spindles**

Diamond polishing tool for acrylic.



**CUSTOM DESIGN
AVAILABLE**



**Glass clear
surface finish**

Generates no tension in the material.

Art.no. UP-CUT	d	D	ℓ	L
S1-1,0/3-4-30 A	1,0	3	4	30
S1-1,5/3-6-30 A	1,5	3	6	30
S1-2,0/3-6-30 A	2,0	3	6	30
S1-2,0/3-8-30 A	2,0	3	8	30
S1-2,0/3-11-38 A	2,0	3	11	38
S1-2,5/3-6-30 A	2,5	3	6	30
S1-2,5/3-11-38 A	2,5	3	11	38
S1-3,0/3-6-30 A	3,0	3	6	30
S1-3,0/3-11-38 A	3,0	3	11	38
S1-3,0/3-22-50 A	3,0	3	22	50
S1-2,0/4-6-50 A	2,0	4	6	50
S1-3,0/4-11-50 A	3,0	4	11	50
S1-4,0/4-8-50 A	4,0	4	8	50
S1-4,0/4-12-50 A	4,0	4	12	50
S1-4,0/4-14-50 A	4,0	4	14	50
S1-4,0/4-22-50 A	4,0	4	22	50
S1-4,0/4-32-64 A	4,0	4	32	64
S1-2,0/6-6-50 A	2,0	6	6	50
S1-3,0/6-6-50 A	3,0	6	6	50
S1-3,0/6-11-50 A	3,0	6	11	50
S1-3,0/6-22-60 A	3,0	6	22	60
S1-4,0/6-8-50 A	4,0	6	8	50
S1-4,0/6-12-50 A	4,0	6	12	50
S1-4,0/6-14-50 A	4,0	6	14	50
S1-4,0/6-22-50 A	4,0	6	22	50
S1-5,0/6-12-50 A	5,0	6	12	50
S1-5,0/6-16-50 A	5,0	6	16	50
S1-5,0/6-22-50 A	5,0	6	22	50
S1-6,0/6-12-50 A	6,0	6	12	50
S1-6,0/6-22-50 A	6,0	6	22	50
S1-6,0/6-22-58 A	6,0	6	22	58
S1-6,0/6-32-64 A	6,0	6	32	64
S1-6,0/6-32-100 A	6,0	6	32	100
S1-6,0/6-42-76 A	6,0	6	42	76
S1-8,0/8-22-64 A	8,0	8	22	64
S1-8,0/8-32-64 A	8,0	8	32	64
S1-8,0/8-42-76 A	8,0	8	42	76
S1-8,0/8-42-100 A	8,0	8	42	100
S1-8,0/8-55-100 A	8,0	8	55	100
S1-10,0/10-22-64 A	10,0	10	22	64
S1-10,0/10-32-76 A	10,0	10	32	76
S1-10,0/10-55-100 A	10,0	10	55	100
S1-10,0/10-75-120 A	10,0	10	75	120

